

PREPARE GARAGE DOOR FOR INSTALLATION TOOLS NEEDED

DO NOT RE-USE PARTS AND WIRING FROM AN OLD OPENER. YOUR NEW PERFORMAX OPENER WILL NOT WORK IF OLD PARTS AND WIRING ARE USED. THIS WILL ALSO VOID THE WARRANTY.

BEFORE beginning installation:



1. Disable locks and disengage trolley from current opener.
2. Perform the following door test to ensure your door is balanced and in good working condition.

Make sure garage door is fully closed before you start the installation


To test your garage door:

1. Raise and lower the door to check if there is any sticking or binding.
2. Check for loose hinges, damaged rollers, frayed cables and damaged or broken springs.
3. Lift the door approximately halfway and release. The door should stay at that point under proper spring tension.

Call a qualified garage door service technician if your door binds, sticks or is unbalanced.

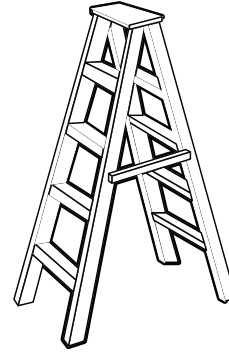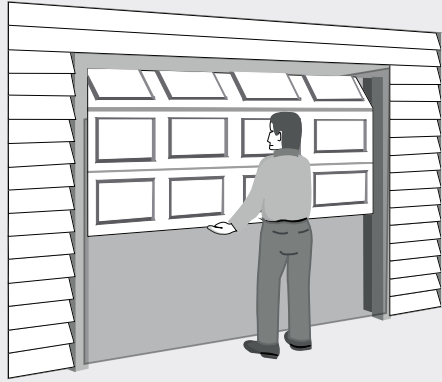

Step Ladder




Level




Pencil



Screwdriver




Adjustable Wrench




Tape Measure




Pliers




Drill, 3/16" and 5/16" Drill Bits




Rubber Mallet



Ratchet with 1/4", 7/16" and 1/2" sockets



Hack Saw



Hammer

Note: tools shown are not included.